

16*GE+8*GF Gigabit Managed Industrial Ethernet Switch

Model: IES3024-16G-8GS

➤ Features

- 16*10/100/1000M RJ45+ 8*100/1000M SFP fiber Port Industrial Ethernet Switch
- Support L2+ full network management;
- Switching capacity: 598Gbps,MAC table: 32K;
- Input voltage:DC48-57V,Redundant dual power 6-bit industrial terminals;
- IP protection level: IP40; Rail-type installation;
- 5 years warranty.



The IES3024-16G-8GS is a full Gigabit managed industrial ethernet switch. it has 16*10/100/1000M RJ45 ports + 8*Giga SFP fiber slot ports. It is suitable for intelligent transportation, rail transportation, electric power industry, mining mining, metallurgy and green energy construction and so on. A reliable communication networks.

The IES3024-16G-8GS has the leading ring network technology, supporting a variety of industrial redundant ring network protocol, any port can be a ring, support chain type, star type, double star type, ring type, tangent ring, intersecting ring, coupling ring, ring network 50ms self-healing. This series of models have high reliability, high security and high manageability, ensure reliable transmission of key data, support remote management, and can manage cluster management with optical network NMS network management platform to achieve the whole process without blind point network management.

➤ Description

Model	IES3024-16G-8GS
Interface	16*10/100/1000M RJ45 ports (Data/Power); 8*100/1000M uplink SFP+ fiber slot ports (Data); 1*Console RS232 port (115200,N,8,1); 2 sets of V+, V- redundant DC power interface (6 Pin Phoenix terminal)
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x
Ethernet Port	Port 1-16 can support 10/100/1000BaseT (X) automatic detection, full / half duplex MDI/MDI-X adaptive
SFP Port	Gigabit SFP+ optical fiber interface, default matching optical modules, need to buy separately, (optional order mode / multi-mode, single fiber / double fiber optical module.
Forwarding Mode	Store and Forward
Switching Capacity	598Gbps
Forwarding Rate@64byte	77.38Mpps
MAC	32K
Buffer Memory	24M
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
Optical Cable	Multi mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Power Consumption	Standby:<16W; Full load:<240W
LED	Power indicator: PWR (Green); Network indicator: 1-16(Link/Act)/(Orange),17-24(Link/Act)/ (Green); POE indicator: PoE (Green)
Power Supply	Input voltage:DC48-57V,Redundant dual power 6-bit industrial terminals;


Operation TEMP / Humidity	-40~+85°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+125°C;5%~95% RH Non condensing
Dimension	165*148*68.5mm
Net /Gross Weight	<2kg / <2.5kg
Lightning protection / protection level	Lightning protection: 6KV 8/20us;Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class A IEC61000-6-2(Common Industrial Standard)
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS;
Warranty	5 years , lifelong maintenance.
Business features (only restricted management function models)	
Layer 3 Function	Support L2+ Layer 3 soft routing forwarding, non-linear speed Support static routing / default routing 128, 1024 ARP software forwarding
VLAN	Support port based VLAN (4K), IEEE802.1q Support protocol based VLAN Support Access, Trunk, Hybrid three types of port configuration Support QinQ configuration

Port Aggregation	<p>Support LACP</p> <p>Support static polymerization</p> <p>Support the largest 8 aggregation groups, each aggregation group supports 8 ports.</p>
Spanning Tree	<p>Support STP(IEEE802.1d)</p> <p>Support STPRSTP (IEEE802.1w)</p> <p>Support STP MSTP (IEEE802.1s)</p>
Industrial Ring Network Protocol	<p>Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring.</p> <p>The self healing time of the ring network is less than 20ms</p>
Multicast	<p>Support IGMP Snooping V1/V2 and support 1024 multicast groups at most. Support the user's quick departure mechanism</p> <p>Support MLD Snooping V1/V2</p> <p>Support multicast VLAN</p>
Mirror	<p>Bi-directional traffic mirroring supporting the basic port</p>
QoS	<p>Support Diff-Serv QoS</p> <p>Each port supports 8 output queues Support 802.1p/DSCP priority mapping</p> <p>Support queue scheduling mechanism (SP, WRR, SP+WRR) Support priority tag Mark/Remark</p> <p>Support stream based packet filtering Support for stream based redirection</p> <p>Support flow based speed limit</p>

ACL	<p>Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL.</p> <p>Support ACL based on port and VLAN</p>
Safety Characteristics	<p>Support user grading management and password protection</p> <p>Support IEEE802.1X authentication / centralized MAC address authentication Support AAA&RADIUS authentication</p> <p>Support the number of MAC address learning restrictions Support MAC address black hole</p> <p>Support SSH 2 to provide secure passwords for user login. Support SSL to ensure data transmission security</p> <p>Support port isolation</p> <p>Support the speed limit function of ARP message Support IP source address protection</p> <p>Support ARP intrusion detection function Support against DoS attacks</p> <p>Support port broadcast message suppression Support host data backup mechanism</p> <p>Binding capabilities of IP+MAC+VLAN+ ports</p>
DHCP	<p>Support DHCP Client Support DHCP Snooping Support DHCP Serve</p> <p>Support DHCP Relay</p>
Management And Maintenance	<p>Support Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration Support WEB network management (HTTPS)</p> <p>Support FTP, TFTP, Xmodem, SFTP file download management</p> <p>Support SNMP V1/V2C/V3</p> <p>Support one bond reduction Support NTP clock</p> <p>Support system work log Support Ping detection Support cable state detection</p> <p>Support CPU instant utilization status view Support link layer discovery protocol LLDP</p> <p>Support NMS intelligent management center</p>

<p>System Requirements</p>	<p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; Cat5e or later Ethernet cable; TCP/ IP, network adapter and network operating system (Microsoft Windows, Linux or Mac OS X) installed on on every computer in the network.</p>
----------------------------	--

DIMENSION

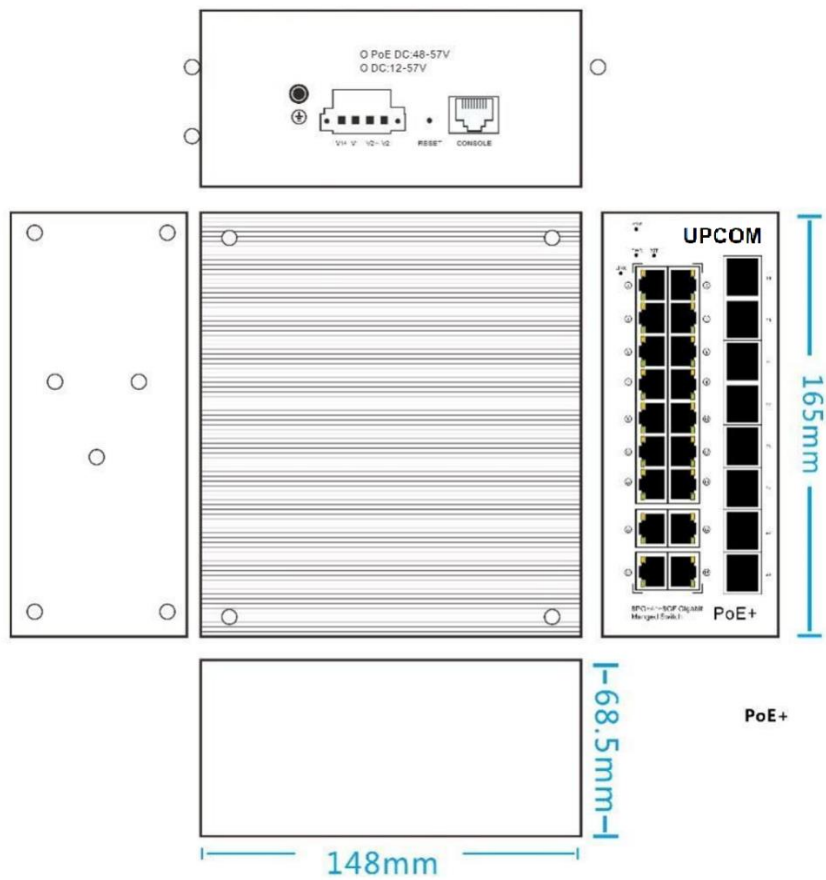

CONTENT	QTY	UNIT
24 Ports Full Gigabit Managed Industrial Ethernet Switch (IES3024-16G-8GS)	1	SET
User Guide	1	PC
Warranty Card	1	PC